




72" Twin Updraft – Elite Series Pop Clean **Model No. 2973 (52 oz. Medallion)**

General image shown for reference.

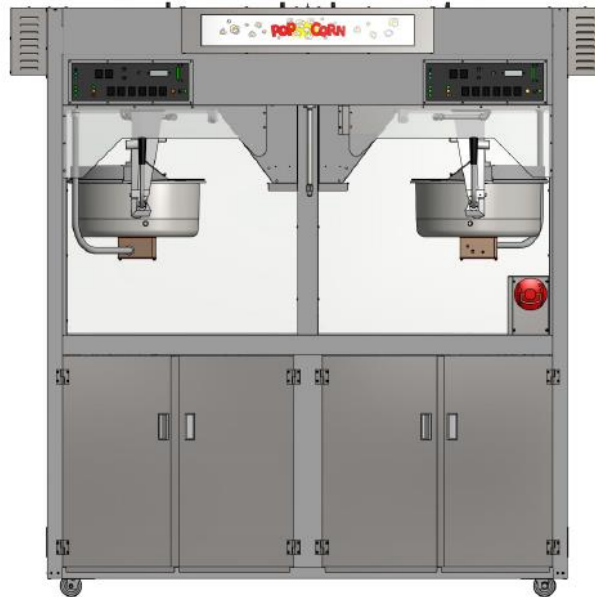


POWER REQUIREMENT: 220 - 240 Volt (3 Phase), Watts: 8270, 50/60 Hz.
5 Wire Type – 3 phase + 1 Neutral + 1 Ground.
32 or 40 Amps Isolator switch - 2 No's

Features:

- Two 52 oz. Stainless Steel, Top Hat Kettles.
- Improved Big Eye Controller.
- Oil Level Display.
- Temperature/Batch Counter Display.
- Salt-Sweet, Flexi-Pop, Deep Well.
- All stainless-steel construction.
- All LED lighting of cabinet and signs.
- Reversible LED or LED Neon Sign from Front Counter (customer side) to Back Counter (operator side).



Updraft units need a minimum of 13" clearance on top of unit to change filters.

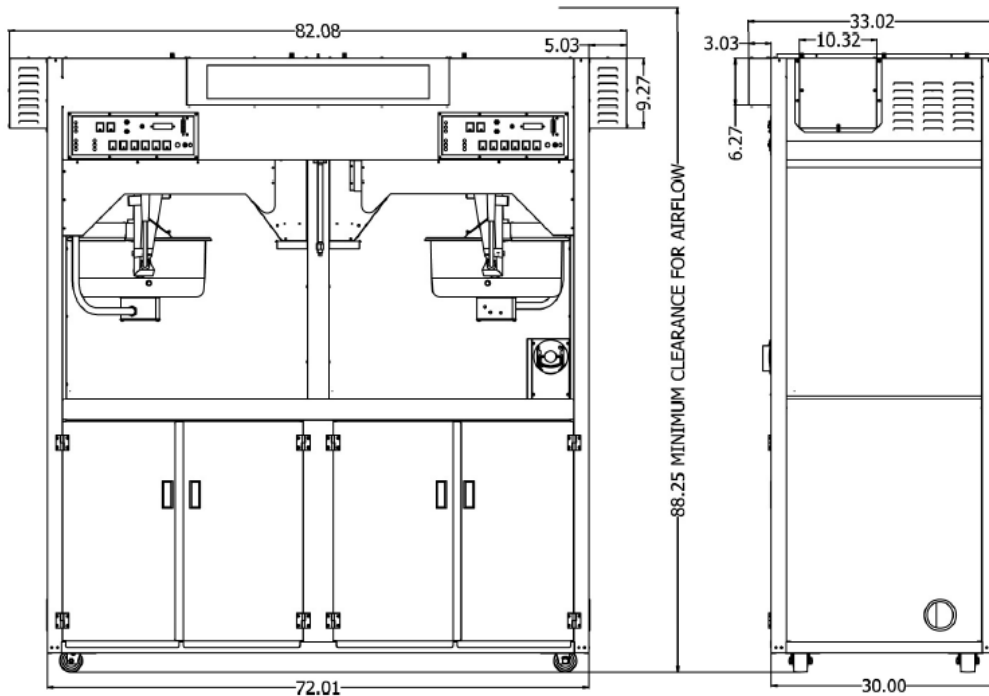

Overall Dimension:

Width: 82" – 209 cm

Depth: 33" (30" cabinet; 3" Sign) - 84cm

Height: 88.25" – 225 cm

Filter / Ventilation Specifications:

- ✓ Tested and approved to ANSI/UL 710B (Integrated recirculating ventilation system / Ductless Hood).
- ✓ Meets EPA-202 Standards for clean air of less than 5 mg of particulates. Updraft Models tested to 3.6 mg particulates.
- ✓ Filtering system consists of grease baffle, 4 inch pleated second-stage filter, and final HEPA box filter. Caution lights alert operator to replace filters when required. (est. 4-6 months)

Oil Delivery System:

Unit supplied with Model 2257-00-010. Bag-In-A-Box or 2114-00-010 Bucket Pump System.