




Model No. 2973 Popclean Elite Popper With Membrane controls

General image shown for reference.

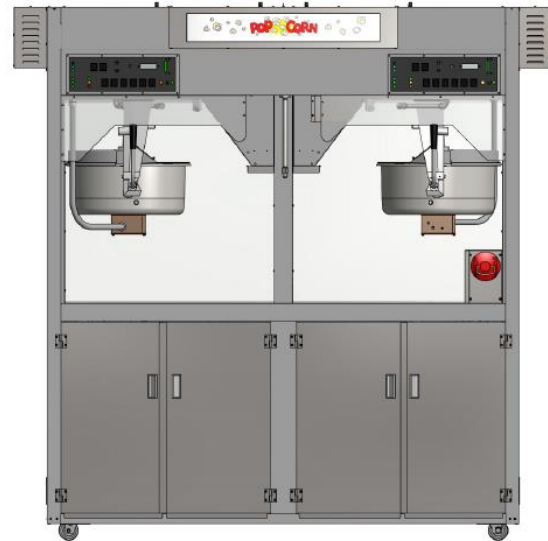

Advance Membrane Controls gives you the advantage!

To better the user experience, gold medal is Introducing advanced Membrane Control for the PopClean Elite Popper Series. More Intuitive and practical than Traditional rocker switches, it makes programming and Operation easier.



POWER REQUIREMENT: 220 - 240 Volt (3 Phase), Watts: 8270, 50/60 Hz.
5 Wire Type – 3 phase + 1 Neutral + 1 Ground.
42 Amps Isolator switch - 2 No's



Membrane Keypad & Features:

- Visually appealing backlite membrane Keypad
- Membrane Keypad is easier to Clean
- A 2-line by 16-Character LCS display enhances readability
- It Shows kettle temperature, Cycle count and Oil Level status
- Convenient One-time Oil Calibration
- Simple Programming and customization allow users to experiment with different recipes.
- Two 52 oz. Stainless Steel, Top Hat Kettles.
- Improved Big Eye Controller.
- Oil Level Display.
- All stainless-steel construction.
- All LED lighting of cabinet and signs.

Filter / Ventilation Specifications:


- ✓ Tested and approved to ANSI/UL 710B (Integrated recirculating ventilation system / Ductless Hood).
- ✓ Meets EPA-202 Standards for clean air of less than 5 mg of particulates. Updraft Models tested to 3.6 mg particulates.
- ✓ Exhaust Blower output rated at 900 CFM.
- ✓ Filtering system consists of grease baffle, 4 inch pleated second-stage filter, and final HEPA box filter. Caution lights alert operator to replace filters when required. (est. 4-6 months)

Oil Delivery System:

Unit supplied with Model 2257 Bag-In-A-Box Oil Pump.



Updraft units need a minimum of 13" clearance on top of unit to change filters.

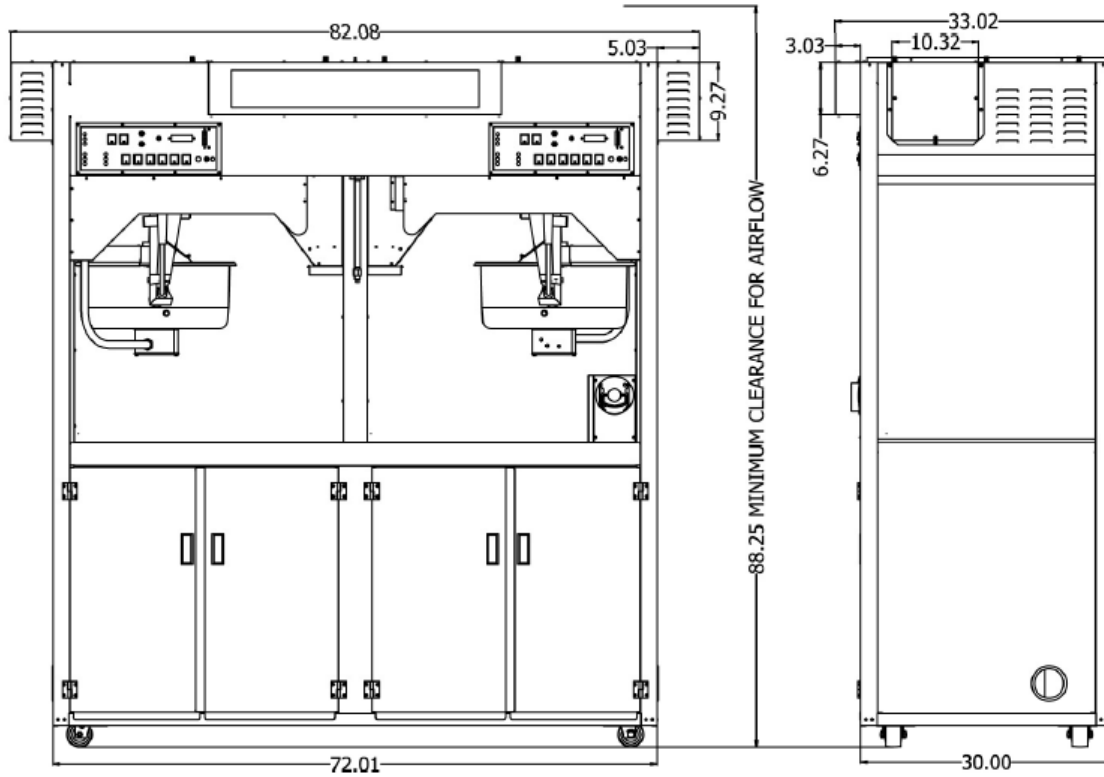

Overall Dimension:

Width: 82" – 209 cm

Depth: 33" (30" cabinet; 3" Sign) - 84cm

Height: 88.25" – 225 cm

Weight: 600Kg